



LED Lamps


LED Light - The Easy Way to Retrofit

LED LAMPS

FUTURE LIGHTING

- **PLUG & PLAY**
- **HIGHLY EFFICIENT LIGHTING REDUCES CARBON FOOTPRINT**
- **AVAILABLE IN DIFFERENT COLOUR TEMPERATURES AND FIELD ANGLES**
- **INTEGRATED SUPERIOR THERMAL MANAGEMENT**
- **LONG SERVICE LIFE OF UP TO 45,000 HOURS (>50% OUTPUT)**
- **LOW MAINTENANCE**
- **NO UV AND IR RADIATION**

Service life expectation (lumen depreciation)

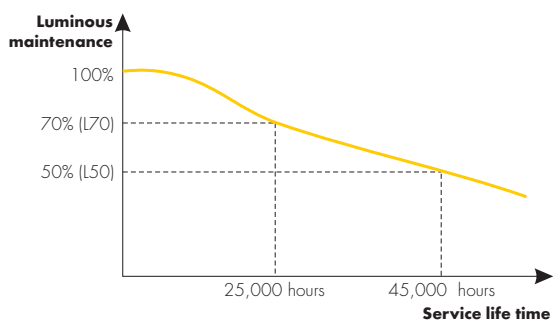

LED – THE GREEN FUTURE LIGHTING

LEDs contain no mercury and are low on energy consumption, as a result of which they lead the field when it comes to “green lighting”. Thanks to their eco-friendly properties, they can make a valid contribution to reducing your carbon footprint and countering the greenhouse effect. Moreover, LEDs start instantaneously at full brightness and are available in many colours.

In addition to providing UV- and IR-free light, LEDs are vibration-proof and have a very long service life that further increases the overall efficiency of any lighting system. As LED lamps are now powerful enough to replace both incandescent and low-voltage halogen lamps, they are becoming increasingly popular beyond the field of decorative lighting.

What VS LED lamps can do for you?

VS has launched a range of high-efficiency, plug-and-play LED lamps with a long service life that can replace both incandescent and halogen lamps with minimum effort and without having to change existing casings. This not only saves time and money, but also immediately delivers energy-saving benefits. The new range of highly efficient VS LED lamps is suitable for both residential and commercial applications.

In addition, VS LED lamps are available with a wide range of bases to suit many luminaires. The simplicity and convenience with which existing lighting systems can now be converted to LED mean saving energy and going greener have never been easier.

Typical applications

- Residential lighting
- Commercial lighting
- Spot lighting
- Window display lighting
- Show case lighting
- Entertainment lighting



RoHS




Low-voltage LED Lamps

Suitable for 12 V AC magnetic transformers and
12 V DC electronic drivers
Not suitable for 12 V AC electronic converters


MR16, 4 W

Operating temperature: -20 to 40 °C
Storage temperature: -40 to 60 °C
Input voltage: 12 V AC/DC
Not dimmable
Base: GU5.3



MR16, 6 W

Operating temperature: -30 to 40 °C
Storage temperature: -40 to 60 °C
Input voltage: 12 V AC/DC
Not dimmable
Base: GU5.3




Type	Ref. No.	Colour	Colour temperature K	CRI R _a	luminous flux lm	Light intensity cd	Radiation angle °	Power W
MR16, 4 W								
MR16-4-2700-38-II	549093	warm white	2700	≥ 80	170	1300	38	4
MR16-4-3000-38-II	549094	warm white	3000	≥ 80	190	1500	38	4
MR16-4-4000-38-II	549095	neutral white	4000	≥ 75	200	1700	38	4
MR16-4-6000-38-II	549096	cool white	6000	≥ 70	240	1900	38	4
MR16, 6 W								
MR16-6-2700-58-II	549097	warm white	2700	≥ 80	300	1050	58	6
MR16-6-3000-58-II	549098	warm white	3000	≥ 80	330	1100	58	6
MR16-6-4000-58-II	549099	neutral white	4000	≥ 75	360	1150	58	6
MR16-6-6000-58-II	549100	cool white	6000	≥ 70	390	1200	58	6
MR16-6-2700-70-II	549101	warm white	2700	≥ 80	300	750	70	6
MR16-6-3000-70-II	549102	warm white	3000	≥ 80	330	800	70	6
MR16-6-4000-70-II	549103	neutral white	4000	≥ 75	360	850	70	6
MR16-6-6000-70-II	549104	cool white	6000	≥ 70	390	900	70	6

Low-voltage LED Lamps

Suitable for 12 V AC magnetic transformers and
12 V DC electronic drivers
Not suitable for 12 V AC electronic converters

AR111, 12 W

Operating temperature: -20 to 40 °C
Storage temperature: -40 to 60 °C
Input voltage: 12 V AC/DC
Not dimmable
Base: G53




Type	Ref. No.	Colour	Colour temperature K	CRI R _a	luminous flux lm	Light intensity cd	Radiation angle °	Power W
AR111-12-2700-38-II	566031	warm white	2700	≥ 80	450	3000	38	12
AR111-12-3000-38-II	566032	warm white	3000	≥ 80	500	3350	38	12
AR111-12-4000-38-II	566033	neutral white	4000	≥ 75	550	3800	38	12
AR111-12-6000-38-II	566034	cool white	6000	≥ 70	680	4800	38	12
AR111-12-2700-60-II	566035	warm white	2700	≥ 80	450	900	60	12
AR111-12-3000-60-II	566036	warm white	3000	≥ 80	500	1000	60	12
AR111-12-4000-60-II	566037	neutral white	4000	≥ 75	550	1100	60	12
AR111-12-6000-60-II	566038	cool white	6000	≥ 70	680	1360	60	12

Typical luminance of MR16 and AR111 at 1, 2 and 3 meters

Intensity (lux)	Colour temperature																	
	MR16, 4W 38°			MR16, 6W 58°						AR111, 12W 38°						60°		
	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m			
Warm White 2700 K	1300	325	145	1050	263	117	750	188	84	3000	750	335	900	225	100			
Warm White 3000 K	1500	375	167	1100	275	122	800	200	88	3350	837	372	1000	250	111			
Neutral White 4000 K	1700	425	189	1150	287	127	850	212	95	3800	950	422	1100	275	122			
Cool White 6000 K	1900	475	211	1200	300	133	900	225	100	4800	1200	533	1360	340	151			

Typical light distribution curves

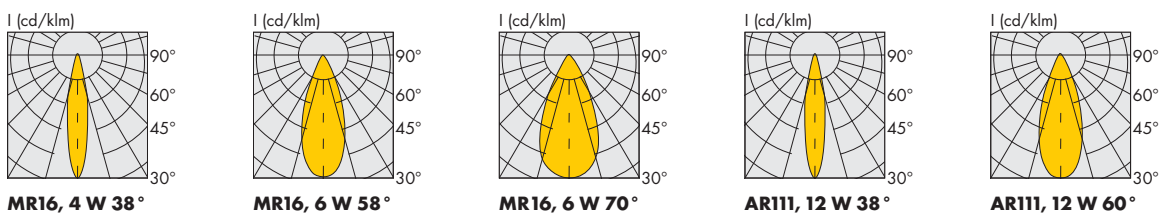

Electronic Converter for LED Lamps 12 V

LEDLine EDXe 112

Vossloh-Schwabe's LEDLine EDXe 112/12 V converter is a control component with a voltage output of DC 12 V and an output of up to 12 W to operate LED applications.

The converter is electronically protected against overload, overheating and short-circuiting.

Shape: 103.5x36x22 mm

Weight: 60 g

Mains voltage: 220/240 V

Mains frequency: 50 - 60 Hz

Protection against "no load" operation

Protection class II

SELV-equivalent

Degree of protection: IP20

Power factor: 0.57

EN 61347-1; EN 61347-2-13 (Safety)

EN 61000-3-2 (Mains Harmonics)

EN 55015 (Non radio disturbance)

EN 61547 (EMC Immunity Requirements)

EN 62384 (Performance)

Service life time: 50,000 hrs

permanent operation when maximum temperature

t_c max. at t_c point will not be exceeded;

failure rate: < 0.2% per 1,000 hrs

Converter EDXe 112

Output: 0.1 - 12 W

Voltage output: 12 V \pm 0.6 V

Output current: 0.1 - 1 A

Ambient temperature t_a : -20 to 50 °C


Casing temperature t_c : 75 °C

Connections:

prim.: 2 x screw terminals 2.5 mm²

sec.: 2 x screw terminals 2.5 mm²

Ref. No.: 186204



Important notice

Low-voltage LED lamps

- Unsuitable for use with electronic converters for halogen lamps. Only use magnetic transformers or LED converters
- Do not connect more than one unit to one transformer
- Do not use in ambient temperatures of more than 40 °C
- Unsuitable for installation in enclosed or airtight luminaires
- For indoor use only
- Unsuitable for use outdoors or in high-moisture environments
- Unsuitable for use with dimmers

Caution

- Always disconnect equipment from the mains before replacing lamps

Mains voltage LED lamps

- Unsuitable for operation with an additional driver
- Integrated high-frequency driver
- Do not use in ambient temperatures of more than 40 °C
- Unsuitable for installation in enclosed or airtight luminaires
- For indoor use only
- Unsuitable for use outdoors or in high-moisture environments
- Dimmable with phase-cut dimmers (E27 PAR lamps only); minimum dimmer load has to be respected. The compatibility of the lamp to the dimmer has to be confirmed prior to installation to avoid flickering and/or noises. VS PAR lamps are recommended to be used with LEGRAND Universal type 574008 or equivalent.

PLEASE CONTACT US FOR FURTHER COLOUR TEMPERATURES, LIGHT COLOURS OR BEAM ANGLES THAT ARE NOT LISTED IN THIS BROCHURE.


Mains Voltage LED Lamps

With integrated driver

LED lamps made by Vossloh-Schwabe will fit most standard E27 and GU10 bases. These low-power, high-brightness and highly eco-friendly lamps are sure to improve the overall efficiency of your lighting system.


PAR30, 12 W

Operating temperature: -20 to 40 °C
 Storage temperature: -40 to 60 °C
 Input voltage: 220-240 V AC
 Dimming range: 20-100%
 Base: E27



PAR38, 17 W

Operating temperature: -20 to 40 °C
 Storage temperature: -40 to 60 °C
 Input voltage: 220-240 V AC
 Dimming range: 20-100%
 Base: E27

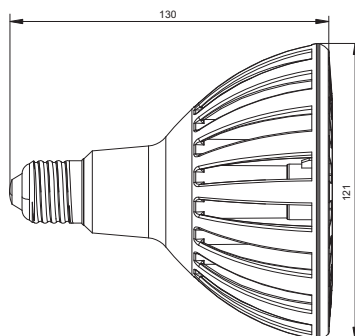

Type	Ref. No.	Colour	Colour temperature K	CRI R _a	luminous flux lm	Light intensity cd	Radiation angle °	Power W
PAR30, 12W								
PAR30-12-2700-38-II	549107	warm white	2700	≥ 80	420	3320	38	12
PAR30-12-3000-38-II	549108	warm white	3000	≥ 80	460	3670	38	12
PAR30-12-4000-38-II	549109	neutral white	4000	≥ 75	570	4530	38	12
PAR30-12-6000-38-II	549110	cool white	6000	≥ 70	680	5400	38	12
PAR30-12-2700-60-II	549111	warm white	2700	≥ 80	420	980	60	12
PAR30-12-3000-60-II	549112	warm white	3000	≥ 80	460	1200	60	12
PAR30-12-4000-60-II	549113	neutral white	4000	≥ 75	570	1325	60	12
PAR30-12-6000-60-II	549114	cool white	6000	≥ 70	680	1580	60	12
PAR38, 17W								
PAR38-17-2700-38-II	549131	warm white	2700	≥ 80	560	4425	38	17
PAR38-17-3000-38-II	549133	warm white	3000	≥ 80	630	5000	38	17
PAR38-17-4000-38-II	549134	neutral white	4000	≥ 75	720	5700	38	17
PAR38-17-6000-38-II	549136	cool white	6000	≥ 70	790	6300	38	17
PAR38-17-2700-60-II	549138	warm white	2700	≥ 80	560	1350	60	17
PAR38-17-3000-60-II	549140	warm white	3000	≥ 80	630	1500	60	17
PAR38-17-4000-60-II	549141	neutral white	4000	≥ 75	720	1770	60	17
PAR38-17-6000-60-II	549142	cool white	6000	≥ 70	790	1900	60	17

Mains Voltage LED Lamps

With integrated driver

GU10, 6 W


Operating temperature: -20 to 40 °C

Storage temperature: -40 to 60 °C

Input voltage: 220-240 V AC

Not dimmable

Base: GU10




Type	Ref. No.	Colour	Colour temperature K	CRI R _a	luminous flux lm	Light intensity cd	Radiation angle °	Power W
GU10, 6 W								
GU10-6-2700-50-II	554575	warm white	2700	≥ 80	260	1610	50	6
GU10-6-3000-50-II	566028	warm white	3000	≥ 80	290	1800	50	6
GU10-6-4000-50-II	566029	neutral white	4000	≥ 75	350	2170	50	6
GU10-6-6000-50-II	566030	cool white	6000	≥ 70	390	2420	50	6

Typical luminance of PAR30, PAR38 and GU10 at 1, 2 and 3 meters

Intensity (lux)	Intensity (lux)															
	PAR30, 12 W						PAR38, 17 W						GU10, 6 W			
	38°			60°			38°			60°			50°			
Colour temperature K	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	1 m	2 m	3 m	
Warm White 2700 K	3320	830	369	980	245	109	4425	1105	491	1350	338	150	1610	400	180	
Warm White 3000 K	3670	918	408	1200	300	133	5000	1250	566	1500	375	167	1800	450	200	
Neutral White 4000 K	4530	1133	503	1325	331	147	5700	1425	633	1770	443	197	2170	542	241	
Cool White 6000 K	5400	1350	600	1580	395	176	6300	1575	700	1900	475	211	2420	605	268	

Typical light distribution curves

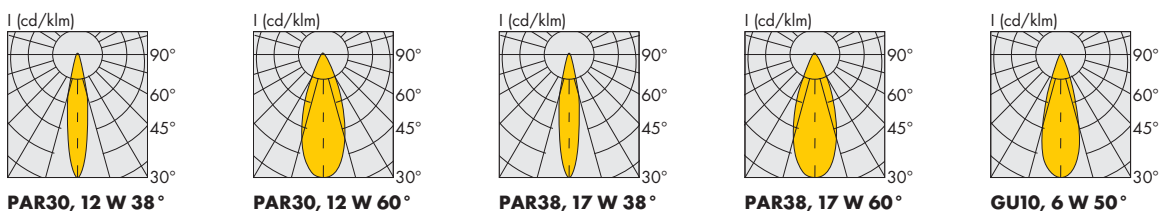

Whenever an electric light goes on around the world, Vossloh-Schwabe is likely to have made a key contribution to ensuring that everything works at the flick of a switch.

Headquartered in Germany, Vossloh-Schwabe has been a member of the global Panasonic group since 2002 and counts as a technology leader within the lighting sector. Top-quality, high-performance products form the basis of the company's success.

Whether cost-effective standard components or tailor-made product developments are needed, Vossloh-Schwabe can satisfy even the most diverse market and customer requirements. Vossloh-Schwabe's extensive product portfolio covers all lighting components: electronic and magnetic ballasts, lampholders, state-of-the-art control systems (Lixos or LiCS) as well as LED systems with matching control gear units.



A member of the Panasonic group **Panasonic**

Vossloh-Schwabe Deutschland GmbH

Hohe Steinert 8 · 58509 Lüdenscheid · Germany
Phone +49/23 51/10 10 · Fax +49/23 51/10 12 17

www.vossloh-schwabe.com

VS VOSSLOH
SCHWABE

All rights reserved © Vossloh-Schwabe
Photos: istock.com

Specifications are subject to change without notice
LEDLamps GB 03/2012